


ATLAS SLIDER

SMOOTH, PRECISE MOTION

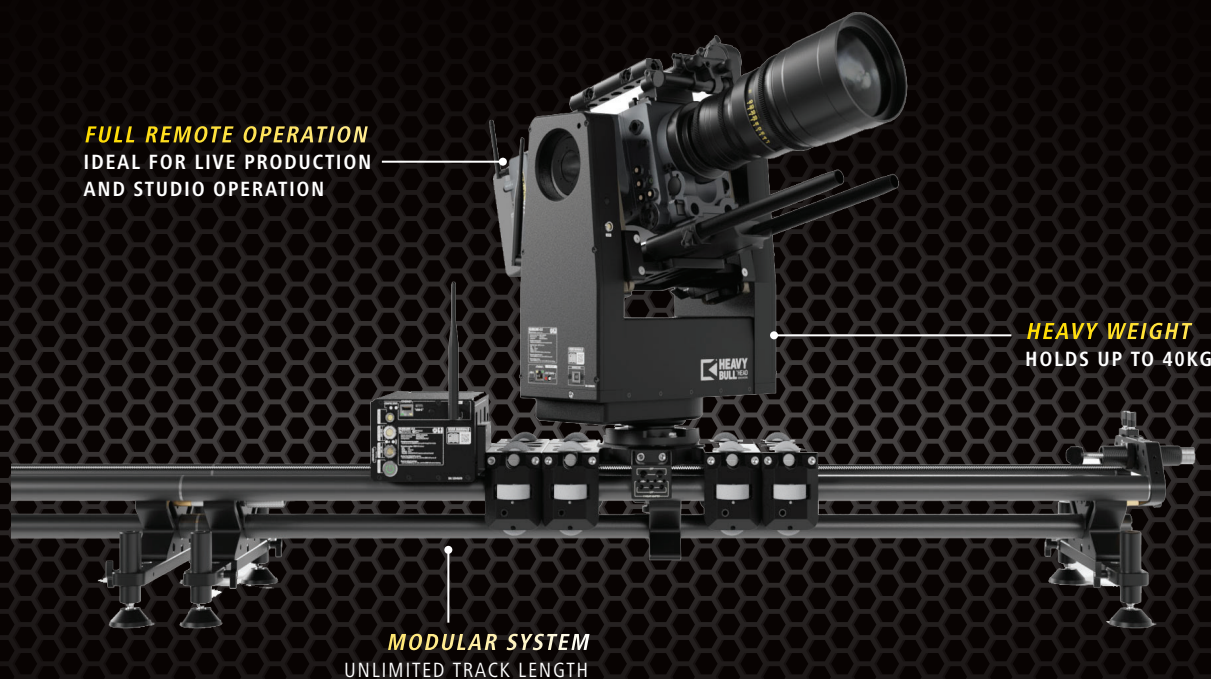

FULL REMOTE OPERATION
IDEAL FOR LIVE PRODUCTION
AND STUDIO OPERATION

HEAVY WEIGHT
HOLDS UP TO 40KG

MODULAR SYSTEM
UNLIMITED TRACK LENGTH

The ATLAS SLIDER is the most versatile slider available on the market. Its modular design means it can be upgraded and expanded to suit any range of application, manual or powered. It can carry up to 40KG payload and offers precise mechanics as a fully equipped motion control system. Perfect for studio and stage, the ATLAS SLIDER comes with a range of set-up options, customised to meet specific demands.



**ATLAS SLIDER &
MONO HEAD STUDIO**



**ATLAS SLIDER &
BULLHEAD STUDIO**



**ATLAS SLIDER &
HEAVY BULLHEAD**

SLIDEKAMERA
BY **MRMC**



MRMC
MARK ROBERTS MOTION CONTROL

ATLAS SLIDER SPECIFICATIONS



FULL REMOTE
OPERATION /
PRODUCTION



ONE-BUTTON
TOUCH PRE-SET
RECALL



RELIABLE FOR
VIDEO AND STILL
CAPTURE



POLYMOTION
CHAT AND MHC
COMPATIBLE



REPEATABLE
MOVES

A COMPLETE RANGE

WITH THE MONO HEAD STUDIO head, powered by reliable stepper motors, this solution is designed for professional cameras up to 16kg.

WITH THE BULLHEAD STUDIO, featuring enforced gearboxes and high-quality connectors, this option provides improved stability and increased payload capacity.

WITH THE HEAVY BULLHEAD, and new powerful servo motors, this high-speed, reduced noise option offers support for payloads up to 20kg.

OPTIONAL UNDERSLUNG MOUNT

- 6x Manfrotto Super Clamps with dedicated spigots
- Compatible with standard stage truss systems



SPECIFICATIONS

Available Lengths	0.8 m, 1.2 m, 2 m, 3m
Weight	0.8m section: 6kg 1.2m section: 8.5kg cart: 3kg
Rail Spacing	160mm
Side Feed Adjustment Range	65mm
Safety Payload	40kg

Rail Mounting Holes 3 mounting ports with 3/8" holes
6 M5 mounting holes for screwing the adapter
4 pits for M4 Allen screws in Manfrotto distance

Rail Ports Hardened 3/8" thread, enabling mounting
the slider directly on tripod.
Threads for mounting feet for putting
the slider on the ground.

Cart Mounting Holes 2 3/8" holes in the upper part
6 1/4" threaded holes on the both sides of the dolly
8 M6 holes for mounting accessories in the front
and back of the dolly

Cart Central Port Aluminum 75/100mm bowl for a
leveling half-ball
A flat plate with a 1/4" or 3/8" and 8 M4 threaded
holes in Manfrotto standard for mounting adapters